


Push-pull strut

galvanized; is attached above a panel joint to stabilize ML-panels, which are assembled in horizontal position, and tied at bottom. Applicable for a wall thickness up to 25".

Ref.-No.	Dimensions	Weight
29-105-70	—	14.5 lb

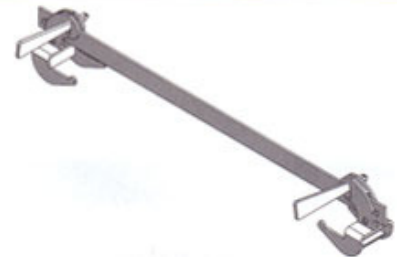

Brace frame 250

galvanized; to align and brace the formwork. Available with or without formwork-prop connector; it consists of a push-pull prop R 250, a brace SRL 120 and a double-jointed foot plate; the formwork-prop connectors are attached to the formwork with flange screws 18.

Ref.-No.	Dimensions	Weight
29-109-25	—	60.6 lb
	without connector	
29-109-20	—	69.4 lb
	with formwork-prop connector	

